

# ClicWall

Decorative wallcovering



# ClicWall, the innovation in decorative wallcovering

**ClicWall** is a MDF wall panelling system that provides a highly decorative finish for renovation projects. Thanks to the patented Uniclic technology, the panels click quickly and effortlessly into one another. The final result is a scratchresistant wall system with a washable outer layer for ease of maintenance. The panels come in standard sizes of 600 mm wide, 2785 mm high and 10 mm thick, other sizes are available on request.

**ClicWall FR** is also included in the offer: fire-retardant panels with Euro Class B-s2,d0. In specific formations, ClicWall achieves a fire resistance of 30 minutes and 1 hour respectively, both supported with a European certificate.

In addition to a comprehensive range of innovative designs, we also offer **ClicWall Deco** The panels are supplied with an outer foil layer that can be finished with paint, fabric, wallpaper or digital print.



# Why choose ClicWall?



# A broad spectrum of high-quality designs

ClicWall offers beautiful solutions for all your interior projects thanks to the diverse range of high-quality UNILIN Evola designs. By choosing an innovative design, you can give a project the added value you are looking for. The collection also contains a large variety of plain designs, that will guarantee a classic and timeless wallcovering.



# Splashproof, scratch-resistant and hygienic

The protective, robust melamine layer ensures a splash proof surface. This upper layer is washable, and makes ClicWall an extremely hygienic and easy to maintain product. If you are looking for a resilient finish, then ClicWall offers you the ideal solution that guarantees the perfect appearance even for the long term.



# Neat and quick finished result

Thanks to the patented Uniclic profile, the panels click into one another perfectly and provide the required end result in a short time. Because the ClicWall panels do not require any further finish, you can save a lot of time and keep dust and dirt during installation to a minimum.





ClicWall guarantees sustainable forestry due to the use of PEFC labelled timber varieties.



# Technical information

### Dimensions and weight

- Standard gross dimensions:
   2785 x 618 x 10 mm (HxWxD)
- Standard nett dimensions: 2785 x 600 x 10 mm (HxWxD)



ClicWall can be supplied in different dimensions with a maximum height of 3050 mm and a maximum width of 1000 mm.

Weight 1 panel: 14 kg


#### Substructures



Metal substructure



Timber substructure



Timber battens straight onto wall

Combinations of these substructures are also possible.

### **Packaging**

- Flat pack: 2 panels per pack
- Bulk: 80 panels stacked with top and baseplate

#### Fixing systems







Screw

Staple

Glue with MS polymers

#### Accessories

Profiles and skirting boards shown below will ensure a perfect finish:

 Flexible interior and external corner profile in a matching design
 Dimensions: 2750 x 42 x 3 mm







 Aluminium external corner profile Length: 2785 mm





- Skirting boards in matching design Dimensions: 2400 x 80 x 12 mm
- Paintable skirting boards
   Dimensions: 2400 x 160 x 16 mm

## Fire resistant ClicWall installations

ClicWall, installed in a specific formation, as described below, will guarantee fire resistance of 60 and 30 minutes respectively.


## ClicWall installation with fire resistance El60

European certificate for non-bearing partition wall - EN 1364-1:1999

#### **Construction:**

- ClicWall FR 10 mm (Euro Class B-s2,d0):
   Fix with assembly kit (MS Polymer dots spaced 200 mm apart) against 12 mm Antivlam (fire retardant chipboard)
- Antivlam 12 mm: fixed with wood screws (4.0 x 25 - spaced 300 mm apart) against metal stud wall
- Rockwool insulation (RockSono Base 210): 40 mm - 35 kg/m3
- Sub structure: metal studs 50 mm
- Seal: PE50 tape (supple isolation tape)

Acoustic standard of installation described above: Rw = 52dB (Cw-4, Ctr-11)




Antivlam against metal stud wall: wood screw 4.0 x 25 ClicWalll $^{\circledR}$  FR on Antivlam: MS-polymer bonding

# ClicWall installation with fire resistance El30

European certificate for non-bearing partition wall - EN 1364-1:2015

#### **Construction:**

- ClicWall 10 mm (Euro Class D-s2,d0): fixed with wood screws (3.5 x 16 - spaced 300 mm apart) against timber substructure
- Rockwool insulation (RockSono Solid 211):
   60 mm 45 kg/m3
- Substructure: timber battens 38 x 63 mm



ClicWall against timber battens: wood screw  $3.5 \times 16$ 





#### Structures ClicWall

UNILIN Evola is a new collection of designs, available in ClicWall, for professionals in the interior sector. With a broad spectrum of designs as well as a palette of solid colours, UNILIN Evola offers the perfect alternative to wood, concrete and other materials. With 105 designs, you will find a solution for every project, without having to compromise on creativity.

UNILIN Evola is also available in melaminated Sheet material, HPL and edging tapes.

ClicWall is available in several structures. Discover the unique lifelike and faithful textures



CST - Soft Pearl
Subtle light grain structure



BST - Topmat
Super-matt surface texture



Matt surface texture

MAT - Mat



W03 - Linewood

Tangible and linear wood texture



W04 - Deepwood
Highly distinctive and extremely deep texture



The distinctive matt texture, deep pores and weathered patina create a pure wood look.



V8A - Royal Oak

The lifelike flowers, smooth patches and knots in the wood translate into a tangible relief texture. The smooth patches are emphasised by a gloss finish. A matt finish emphasises the cracks and knots.



V9A - Heritage Oak

The lifelike cracks and small imperfections mirror the authentic and weathered look of recovered oak.



Z5L - Minnesota Oak

The elaborate wood patterns and small knots create a rustic effect.

Matt and glossy areas combine to give a vibrant, realistic look.



### ClicWall in stock

113 - W06 | Elegant black



**Fire-retardant ClicWall** - Front white (025-CST en 025-W03) and Silicon (625-CST) are supplied from stock on a fire-retardant MDF with fire reaction B-s2,d0. All other designs can be supplied to order on fire-retardant MDF.






## ClicWall to order


ClicWall to order can be supplied in quantities of 80+ panels.





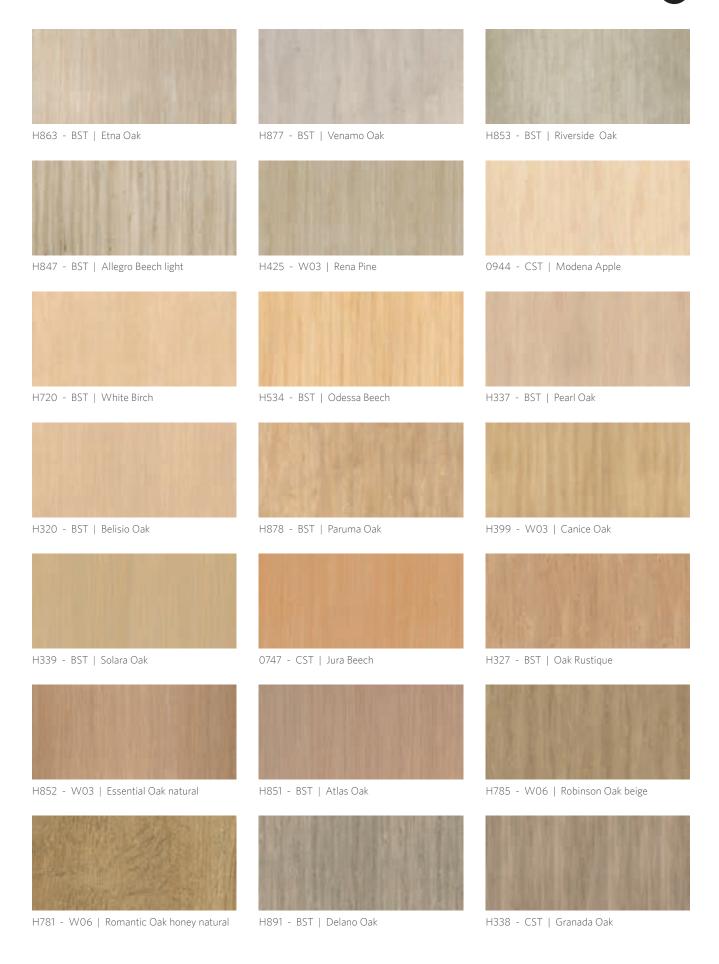

### **≇UNILIN** evola

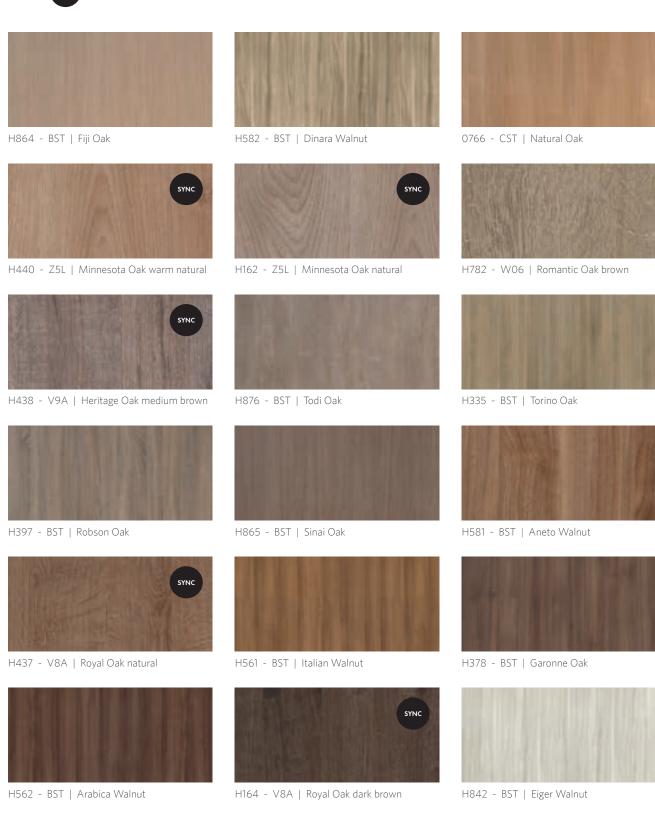



H843 - BST | Snowdon Oak

H161 - V9A | Heritage Oak light

H783 - W06 | Romantic Oak dark grey







H160 - Z5L | Minnesota Oak greige



H844 - BST | Bellavista Oak



H894 - W03 | Nevis Oak



H892 - BST | Logan Oak



H439 - V9A | Heritage Oak dark



H689 - W03 | Amazonia



H336 - BST | Verona Oak



H385 - W03 | Hudson Oak



H687 - CST | Kivu Wenge



H441 - Z5L | Minnesota Oak chocolat



H850 - CST | Fumed Oak



F976 - BST | Granulo



F987 - CST | Oxid grey



F939 - CST | Brushed metal



760 - CST | Brushed Alu

# free. sample. service.

See AND feel the authenticity of our UNILIN Evola designs and test the patented Uniclic system.
Request your free samples at www.unilinpanels.com



#### UNILIN, division panels

UNILIN, division panels is part of the UNILIN group. Since our foundation in 1960, we have grown into an international player supplying solutions for the construction industry, as well as the furniture and interior sectors.

UNILIN is synonymous with (r)evolution. Thanks to continual investment in design, technology, research and development, our divisions have grown to become leaders in their fields.

By means of a powerful vertical integration, from tree to finished product, using creativity as our motor and innovation as our driver, we develop tailor-made solutions to your needs.

