



KERRAFRONT CELLULAR CLADDING





FREEDOM BEGINS AT HOME

At VOX we believe that real freedom begins at home, and the interior is more about your individual needs and lifestyle rather than any specific style. This is why we inspire, advise and provide comprehensive solutions – collections of furniture, doors, floors, decorative walls and elevations all adapted to each other. A suitably selected cladding will not only give your home a unique character but will also provide excellent protection for many years to come.

KERRAFRONT. CLADDING FOR LIFE

Kerrafront is a facade cladding, which, once installed, does not require any maintenance during use. Thanks to the innovative technology used, Kerrafront is extremely durable and resistant to changing weather conditions. It protects the interior of the building and prevents heat loss. It also provides good air circulation, thus preventing the formation of mould and fungus.

Thanks to its elasticity, low weight and simple joining, its installation is quick and easy. It is 100% water resistant and the cut edges do not require any additional protection.





ADVANTAGES

SAVING TIME AND MONEY DURING INSTALLATION:

- Light weight resulting in easy handling
- Wide covering width, built-in locks and factory made nail slots facilitate and speed up the installation
- Material easy to work with – not susceptible to unsightly chips and cracks during shipment and installation
- Cut ends do not absorb water and after installation do not require any additional protection eg painting

NO MAINTENANCE REQUIRED:

- Virtually maintenance-free – no need for painting and other treatment
- Absolutely moisture resistant – does not absorb water and is not susceptible to freeze / thaw complications.
- Does not support bacterial or fungal growth

VOX QUALITY:

- Application of Kerracore technology in the production, which results in outstanding uniformity and density of the cellular core of the product. As a result boards feature dimensional stability and durability
- Matt surface of boards
- Connector – free joining with Connex System



Wood Effect, Caramel Oak



MOISTURE
RESISTANT



IMPACT AND
CRACK RESISTANCE



EASY TO
KEEP CLEAN



PESTS
RESISTANT



PERFECT COVER FOR
THERMAL INSULATION
OF ELEVATION



FACADE
VENTILATION



IT IS 100% SUITABLE
FOR RECYCLING



10-YEAR
WARRANTY



KERRAFRONT WOOD EFFECT



**IN HARMONY
WITH NATURE**

Wood Effect, Malt Oak

WOOD EFFECT

— UNIVERSAL DESIGN

Versatility and timelessness are the characteristic features of the new Wood Effect collection. The wood patterns used in this collection are available in three colours and 2 shapes, suited both for traditional décors as well as more modern arrangements.

— INNOVATIVE SOLUTIONS

The use of modern technologies produced a unique product, both in functional and aesthetic terms. Durable foamed boards are covered with premium quality, textured foil, resistant to mechanical damages, UV- radiation and changing weather conditions.

— A WIDE RANGE OF POSSIBILITIES

The collection is enhanced by colour-matched trims. This allows for thorough refinement of even the smallest element of the elevation. The possibility of combining the Wood Effect panels with the Modern Wood collection can provide additional design variants. The Wood Effect collection is available for single (FS-201) and fourfold panels (FS-304).





Wood Effect, Malt Oak

COLOURS



Malt Oak



Caramel Oak





Alpine Oak



Concrete Oak



Wood Effect, Concrete Oak

KERRACORE TECHNOLOGY

1

SURFACE LAYER (HARD PVC)

Made with polymers hardened during the technical treatment process. Shock- and scratch-resistant, it holds the colour and the unique structure resembling natural wood.


In Wood Effect colours top layer is finished through the use of foils.



2

CORE (FOAM PVC)

Made with a specially-selected mix of minerals and polymers. Characterised by uniformity and a low density which results in the product being very resistant to mechanical damage.

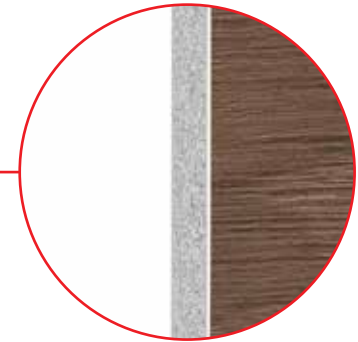

METHODS OF JOINING THE PANELS

THERE ARE TWO METHODS OF JOINING THE PANELS IN THE KERRAFRONT COLLECTION, BOTH ARE SIMPLE AND INTUITIVE.

1

JOINING USING THE CONNEX SYSTEM

The Connex System Click& Push is available for panels with a length of 2.95 m. Joining is made with patented locks and does not require the use of additional accessories. It is almost invisible.



2

JOINING USING JOINT TRIM

To connect panels with a length of 6 m we use a FS-282 centre joint trim.



FS-282



BOARD, PROFILES AND ACCESSORIES

FS-304

Fourfold board: 6 m / 2,95 m Connex
Installation: horizontal / vertical




FS-211

Starter trim
Length 3 m




FS-222*

Universal corner (two-part)
Length 3 m

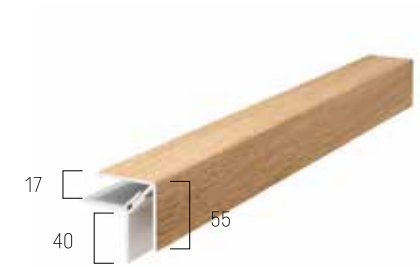


FS-251

Universal trim U
Length 3 m

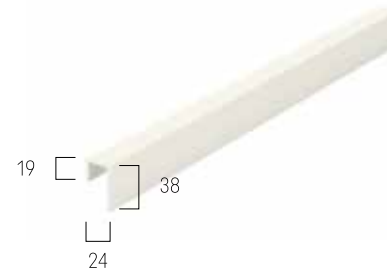


FS-252

Top edge trim (two-part)
Length 3 m

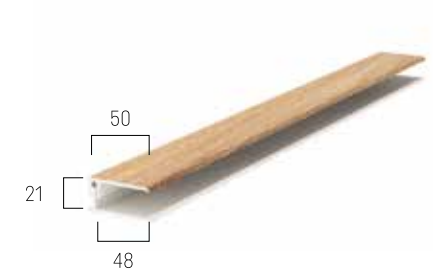

FS-261

Perforated trim
Length 3 m

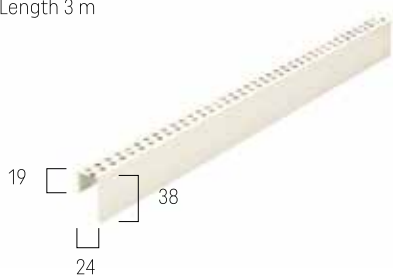

FS-262

Ventilation trim (two-part)
Length 3 m




FS-282

Center joint trim (two-part)
Length 3 m



INOX-UP3.5X35-TX15-A2

Fitting screw



* By foiled colours, universal corner FS-222 have outer part of the trim covered with a veneer and an inner part is in matched plain colour.

All colours shown in this publication are only sample colors and should not be considered as original ones.





VOX Building Products Pvt. Ltd.
6th Floor, Leela Collonnade, The Leela Palace
No.23, HAL Old Airport Road, HAL 2nd Stage, Kodihalli
Bengaluru -560008, India
P.: +91 8043741810
E: customercare@voxindia.co



www.voxindia.co