


LIMA

SPECIFICATIONS

Dimensions	Length: 1220 mm Width: 180 mm Thickness: 5(0.55)mm
Box	9 planks 1.976 sqm 16 kg
Pallet	60 boxes
Surface	Synchrone wood structure (EIR)
Wear class	Intensive commercial use (class 33)
Standard colours	Pure Oak, Smoked Oak
Bevel	Painted 4V bevel
Gloss	4-6 %
Locking system	Drop lock click system
Type of installation	Floating

STRUCTURE

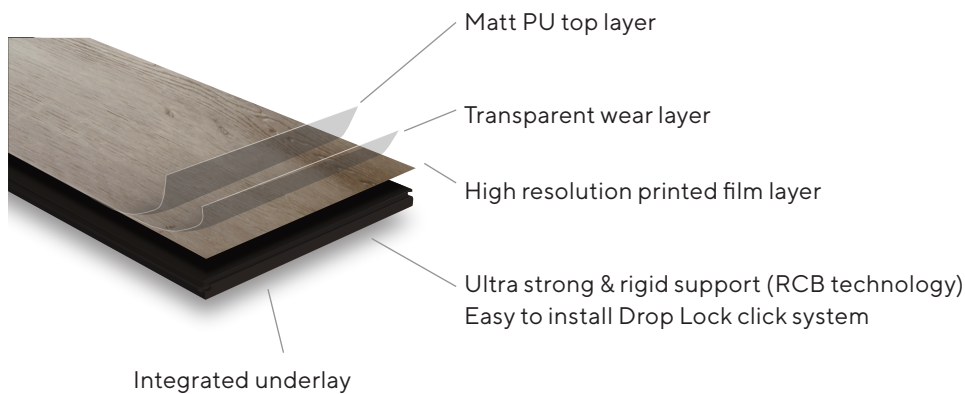

INSTALLATION



PRODUCT CHARACTERISTICS - General

Factor	Standard - EN 14041
Fire resistance	Bfl-S1
Volume mass density	2050±50 kg/m ³
Formaldehyde emission	E1
PCP	< 0.5 ppm
Slipperiness	DS
Thermal resistance	0,03 m ² K/W
Thermal conductivity	0,135 W/(m.K)
Wear resistance	> 4100 r
Impact sound	18 dB
Resistance to staining	-
Surface strength	-
Floorheating	Allowed, according to specific standards